

**gofanco®**

## PRO-MSTDP2DP

1x2 DisplayPort 1.2 MST Hub/Splitter  
with Pigtail Cable

**User's Guide**



Congratulations for owning a gofanco product. Our products aim to meet all your connectivity needs wherever you go.

Have fun with our products!

Please read this manual carefully before first use.

If you need more information about our products, please visit [www.gofanco.com](http://www.gofanco.com).

For technical support, please email us at [support@gofanco.com](mailto:support@gofanco.com).

For drivers/manuals download, please go to <http://www.gofanco.com/download>.

---

## 1. Introduction

The PRO-MSTDP2DP **1x2 DisplayPort 1.2 MST Hub/Splitter with Pigtail Cable** provides the most cost effective and advanced DisplayPort splitter solution on the market, by which the high definition video and high quality audio can be transmitted to 2 different locations without losing quality. PRO-MSTDP2DP can extend the laptop or desktop to additional displays and stream independent content to each individual display to make multitasking easier and increase your productivity. Besides, PRO-MSTDP2DP can mirror the same image or split an image to multiple displays for digital signage applications.

## 2. Features

- DisplayPort 1.2 compliant
- Supports up to 4K2K@30
- HDCP 1.3 compliant
- Video bandwidth: 21.6Gbps
- Supports SST or MST (Multi-Stream Transport)
- Supports xvYCC, x.v.Color & Deep Color
- Easy installation

## 3. Package Contents


- 1x PRO-MSTDP2DP
- 1x Micro-USB to USB cable
- 1x User Manual

## 4. Specifications


Item	Description	
Role of usage	1x2 MST Hub/Distribution Amplifier (Splitter)	
DP compliance	DisplayPort 1.2	
HDCP compliance	HDCP 1.3	
Video bandwidth	21.6Gbps	
Video support	See bandwidth resolution distribution on page 6	
Audio support	LPCM, AC3, DTS	
ESD protection	Human body model — ±15kV [air-gap discharge] & ±8kV [contact discharge]	
PCB stack-up	4-layer board [impedance control — differential 100Ω; single 50Ω]	
Input	1x DP	
Output	2x DP	
DP connector	Standard DisplayPort	
<b>Mechanical</b>		
Housing	Metal enclosure	
Dimensions [L x D x H]	Model	88 x 58 x 23mm [3.5 x 2.3" x 0.9"]
	Package	165 x 111 x 42mm [6.4" x 4.4" x 1.7"]
	Carton	490 x 426 x 352mm [1'6" x 1'4" x 13.8"]
Weight	Model	108g [3.8 oz]
	Package	196g [6.9 oz]
Power supply	5V 1A DC	
Power consumption	2 Watts [max]	
Operation temperature	0~40°C [32~104°F]	
Storage temperature	-20~60°C [-4~140°F]	
Relative humidity	20~90% RH [no condensation]	

## 5. Connection Diagram

PRO-MSTDP2DP allows user to connect two displays to the DisplayPort enabled laptop, Ultrabook, or PC. Configure these added monitors anyway you want; works as a splitter with the same content on each monitor, extended mode with independent monitors, or video wall mode joining multiple monitors together as one display.

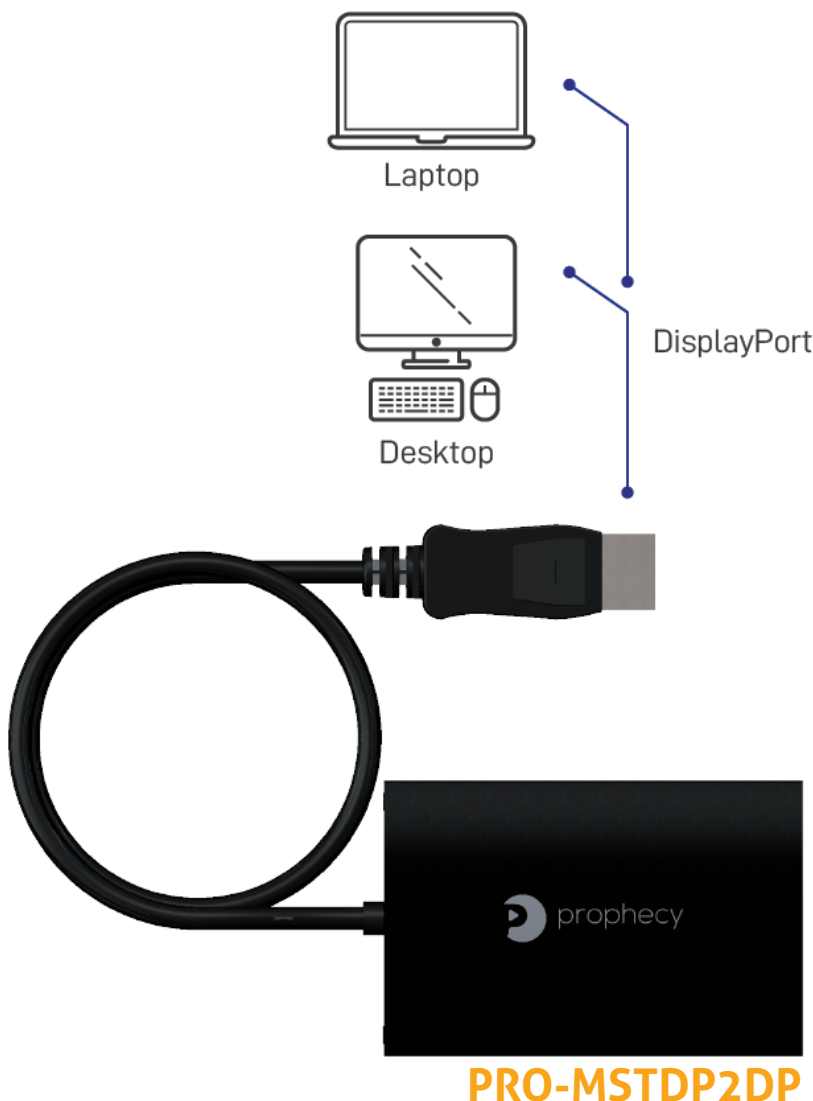

— Mirror Mode —

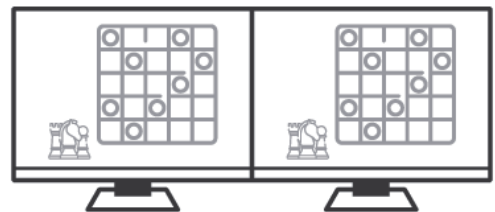

NOTE: Mirror Mode using Windows Display Utility and NVIDIA Utility is limited to 2 displays.

— Extend Mode —



— Videowall Mode —



NOTE: Video Wall Mode (e.g., Panoramic) requires either an AMD Eyefinity, Intel, or NVIDIA Surround technology graphics adapter.


## Notes

1. Total bandwidth is 21.6Gbps\* (under MST mode)

Resolution	% of total bandwidth(21.6Gbps)
3840x2160@60	80%
3840x2160@30	40%
1920x1200@60	30%
1920x1080@60	22%

- \* The total combined bandwidth among all connected displays must NOT exceed 21.6Gbps
2. Supports UHD video resolutions up to 3840x2160@30, and 7.1ch surround audio to deliver high quality video and audio.
  3. Driver or software is NOT required.
  4. Existing video card can be used to minimize the use of system resources.
  5. MacOS does NOT support MST technology and will only mirror each display

## 6. Panel Description

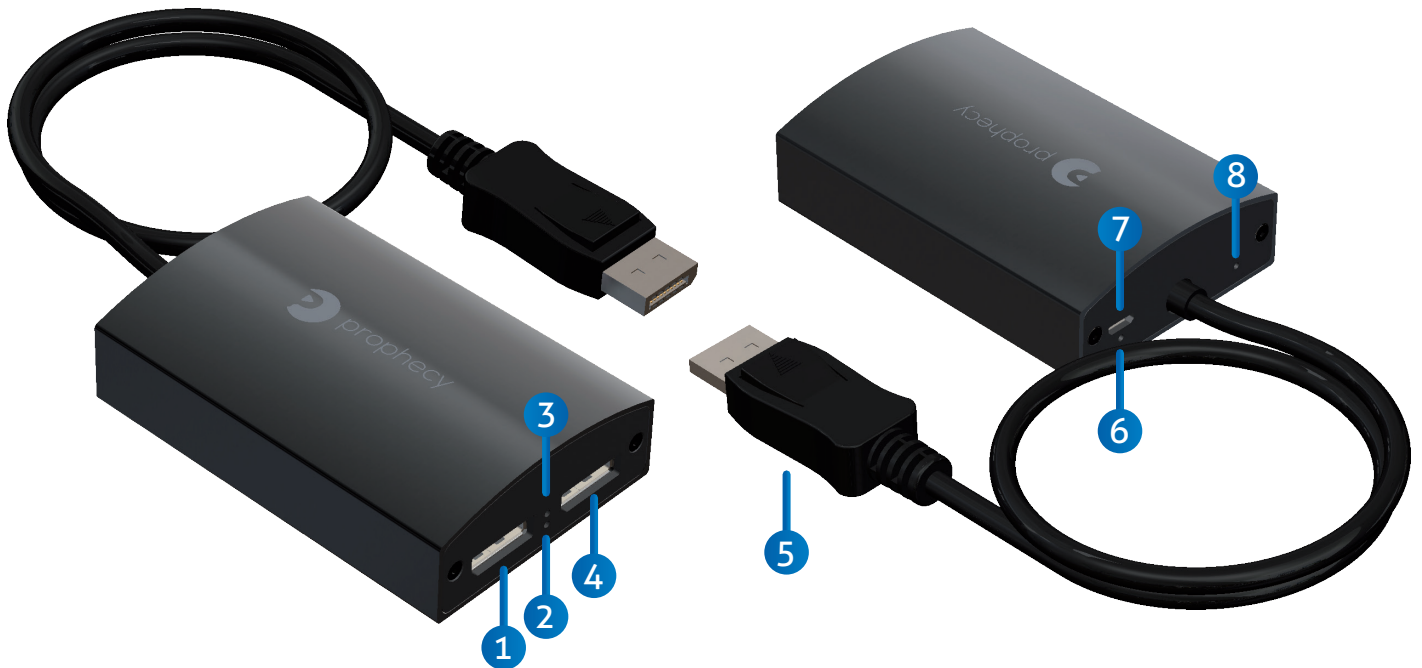

1. DisplayPort output 1
2. Output 2 LED Indicator
3. Output 1 LED Indicator
4. DisplayPort output 2

5. DisplayPort input
6. Power LED Indicator
7. +5V power (Micro-USB)
8. Link LED Indicator

## 7. Notice

### Notes

1. It is limited to two displays under mirror mode using Windows Display Utility & NVIDIA Utility.
2. It requires either an AMD Eyefinity, Intel, or NVIDIA Surround technology graphics adapter under Video Wall mode (e.g., Panoramic).
3. Intel CPUs with HD Graphics are limited to three external monitors altogether.
4. A DisplayPort v1.2 output or later is recommended to enable full functionality. If the source DisplayPort output doesn't support DP 1.2, the MST function is disabled and becomes a Splitter, mirroring your video source across all displays.

### About Compatible Device

1. Systems with an available DisplayPort (DisplayPort v1.2 or later recommended)
2. Compatible OS: Windows 10 / 8.1 & 8 / 7
3. MacOS does NOT support MST technology and will only mirror each display



## 11. Limited Warranty

The SELLER warrants the **PRO-MSTDP2DP 1x2 DisplayPort 1.2 MST Hub/Splitter with Pigtail Cable** free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surge. This warranty is offered by the SELLER for its BUYER with direct transaction only. This warranty is void if the warranty seal on the metal housing is broken.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables and power adapters are limited to a 30 day warranty and must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. **Also, the technical information contained herein regarding the PRO-MSTDP2DP features and specifications is subject to change without further notice.**

## Disclaimer

The product name and brand name may be registered trademarks of related manufacturers. TM and ® may be omitted on the user's guide. The pictures on the user's guide are just for reference, and there may be some slight differences with the actual products.

We reserve the rights to make changes without prior notice to a product or system described herein to improve reliability, function, or design.





*Thank you for choosing gofanco*

[www.gofanco.com](http://www.gofanco.com)