



**gofanco®**

**3-Port USB 3.0 Hub with Gigabit Ethernet - Black  
User's Guide**



P/N: USB3HubLAN

G4-0008A





***Congratulations for owning a gofanco product. Our products aim to meet all your connectivity needs wherever you go. Have fun with our products!***


***Please read this manual carefully before first use.***

If you need more information about our products, please visit [www.gofanco.com](http://www.gofanco.com).

For technical support, please email us at [support@gofanco.com](mailto:support@gofanco.com).

For drivers/manuals download, please go to <http://www.gofanco.com/download>.



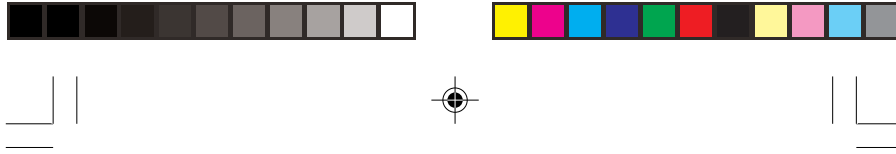

### **Introduction**


The gofanco 3-Port USB 3.0 Hub with Gigabit Ethernet - Black (part# USB3HubLAN) adds three USB 3.0 ports and one Gigabit Ethernet port (RJ45) through a USB Type-A or Type-C port.

### **Features & Specifications**

Chipset	USB 3.0 Hub: VIA VL812-B2 LAN: Realtek RTL8153-CG
Interface	USB 3.0
Connectors	1x USB 3.0 Type-A, Male 3x USB 3.0 Type-A, Female & 1x RJ45, Female (Ethernet)
Max. Data Transfer Rate	USB 3.0 Hub: 5Gbps LAN: 1Gbps
Compatible Networks	10/100/1000 Mbps (Full Duplex Support)
Power	USB Bus-powered (5V DC / 500mA )
Built-in Cable Length	6.69" (17cm)
Color	Black
Dimensions	3.27" (W) x 0.71" (H) x 1.81" (D)
Weight	0.12 lbs

### **Package Contents**

- 3-Port USB 3.0 Hub with Gigabit Ethernet - Black
- Type-C to USB 3.0 Type-A adapter
- Driver CD
- User's guide

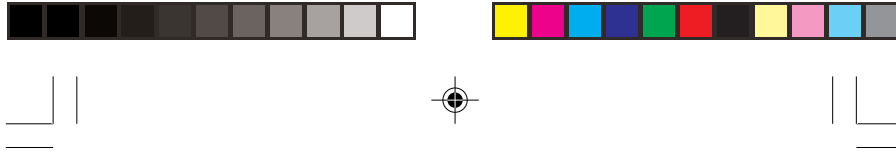

### System Requirements

- Windows or Mac OS systems with an available USB 3.0 port (Type-A or Type-C)
- Windows® 10 (32-/64-bit) / 8.1 & 8 (32-/64-bit) / 7 (32-/64-bit) / Vista (32-/64-bit) / XP (32-/64-bit)
- Mac OS X® v10.6 or later

### Product Layout

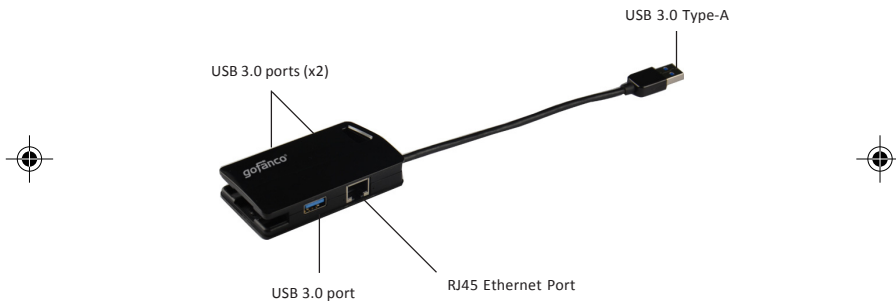


Figure 1: 3-Port USB 3.0 Hub with Gigabit Ethernet - Black

- **USB 3.0 Type-A:** Connects to your system's USB 3.0 port. To connect to a Type-C USB port, use the included Type-C to Type-A adapter
- **USB 3.0 ports (x3):** Compatible with USB 3.0/2.0/1.1 devices
- **RJ45 Ethernet Port:** Wired Ethernet network



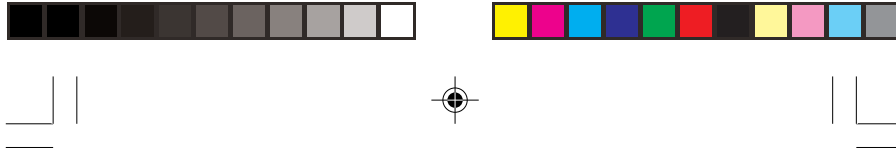


Figure 2: Type-C to USB 3.0 Type-A adapter


## Applications

Add three USB 3.0 ports and one Gigabit Ethernet port (RJ45)

- Via USB Type-A



Figure 3

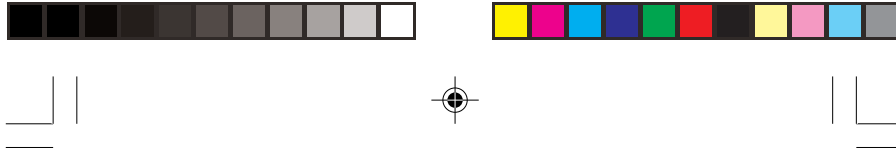

- Via USB Type-C



Use the included Type-C to Type-A adapter for systems with a Type-C USB connector

Figure 4

### Windows Installation (for LAN connection)

**Note:** Windows 7 and later have built in driver support for this adapter. Simply plug in the adapter and the driver will load automatically. If the driver doesn't load, follow steps 2-6 below.  
For earlier Windows OSes, please follow the instructions below.

1. Insert the *adapter* into an available USB port.
2. Insert the driver CD, and a pop-up window **AutoPlay** will show automatically. If not, browse the CD/DVD manually.
3. Choose the folder according to your OS and run **setup.exe**.
4. Follow the on-screen steps to install the driver.
5. After successful installation, click **Finish**.
6. The *adapter* is ready for use.




### Windows Verification

1. Right click **Computer / My Computer** on the desktop, and select **Manage**.
2. Select **Device Manager** then expand **Network adapters** section.
3. **Realtek USB GbE Family Controller** should be displayed.

### Mac OS Installation

1. Insert the *adapter* into an available USB port. (Mac OS has built in driver and it will load automatically.)
2. Insert the driver CD and browse the CD icon on the desktop.
3. Choose **MAC** folder and run **RTUNICv....pkg**.
4. Follow the on-screen steps to update the driver.
5. Once the installation completed, click **Restart**.
6. The *adapter* is ready for use.

### Mac OS Verification

1. Click  on the left-top corner of the taskbar and choose **About This Mac**.
2. Choose **More Info...**, then select **System Report...**
3. Expand **USB** section (under Hardware). **USB 10/100/1000 LAN** should be displayed in the list.





**gofanco**<sup>®</sup>



*Thank you for choosing gofanco*



[www.gofanco.com](http://www.gofanco.com)

