



gofanco®

5-Port HDMI Switcher 4K - Black



P/N: Switcher5p

G4-0025A





Congratulations for owning a gofanco product. Our products aim to meet all your connectivity needs wherever you go. Have fun with our products!


Please read this manual carefully before first use.

If you need more information about our products, please visit www.gofanco.com.

For technical support, please email us at support@gofanco.com.

For drivers/manuals download, please go to <http://www.gofanco.com/download>.



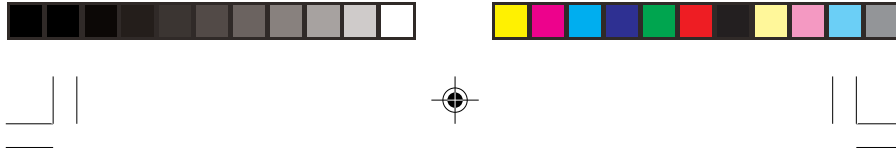

Introduction


gofanco 5-Port HDMI Switcher 4K - Black (part# Switcher5P) allows any of the 5 HDMI sources to be displayed on one HDMI display and supports ultra-high resolution up to 4K.

Specifications

Spec.	HDMI v1.4
Compliance	HDCP 1.4, 36-bit deep Color, 3D
Video Bandwidth	10.2Gbps
Video support	480p, 720p, 1080i, 1080p@60Hz, 4Kx2K (3840x2160 @60Hz YUV 4:2:0)
Audio support	Dolby-trueHD, DTS-HD master audio
Connectors	Input: HDMI x 5 Output: HDMI x 1
Transmission distance (4Kx2K @60Hz)	Input: 5m (Max.) for HDMI standard cable_26AWG Output: 10m (Max.) for HDMI standard cable_26AWG
Power adapter	DC 5V / 1A
Dimensions	4.52" (W) x 0.98" (H) x 2.44" (D)
Weight	0.28lbs

Package Contents

- 5-Port HDMI Switcher 4K - Black
- Power Adapter
- IR remote control
- User's guide

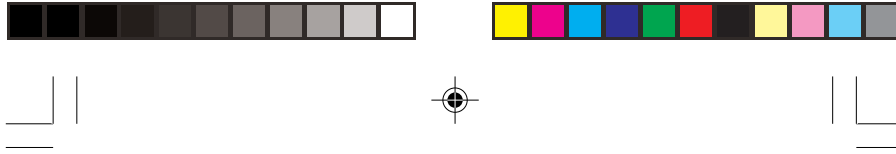

Layout

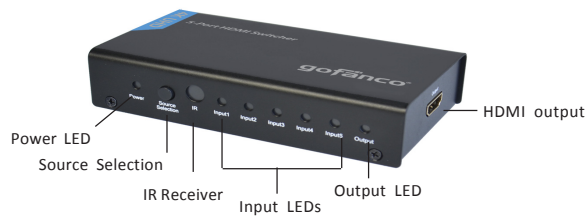



Figure 1: 5-Port HDMI Switcher 4K - Black

- **Power LED:** On when the unit is powered
- **Source Selection:** Press to select the input source (Input 1, 2, 3, 4 or 5)
- **IR Receiver:** Receive IR signal from the remote control
- **Input LEDs:** On when input signals are detected
- **Output LED:** On when the output signal is detected
- **HDMI Output:** Connect to an HDMI display or TV



Figure 2: 5-Port HDMI Switcher 4K - Black

- **Power plug:** Power adapter plug
- **HDMI Inputs (x5):** Connect to HDMI source devices

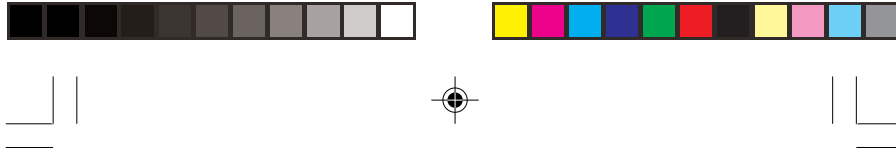

IR Remote Control


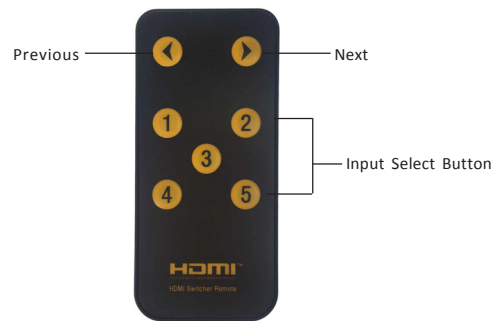



Figure 3: IR Remote Control

- **Previous:** Select the previous input source
- **Next:** Select the next input source
- **Input Select Button (1-5):** Select input source 1, 2, 3, 4 or 5

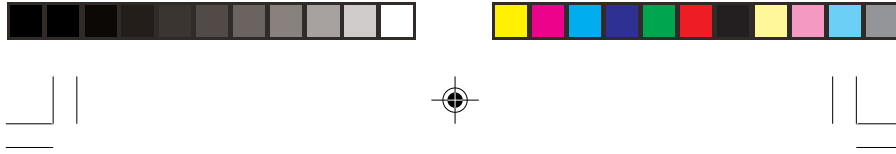

Hardware Installation

1. Power off all source devices and displays.
2. Connect up to 5 HDMI source devices to the switcher's HDMI input ports using HDMI cables (cables not included).
3. Connect your HDMI display to the switcher's HDMI Output with an HDMI cable (cable not included).
4. Connect the included power adapter to the switcher's Power plug and plug it into a reliable power outlet.
5. Power on all of the connected devices.
6. The switcher is now ready for use.

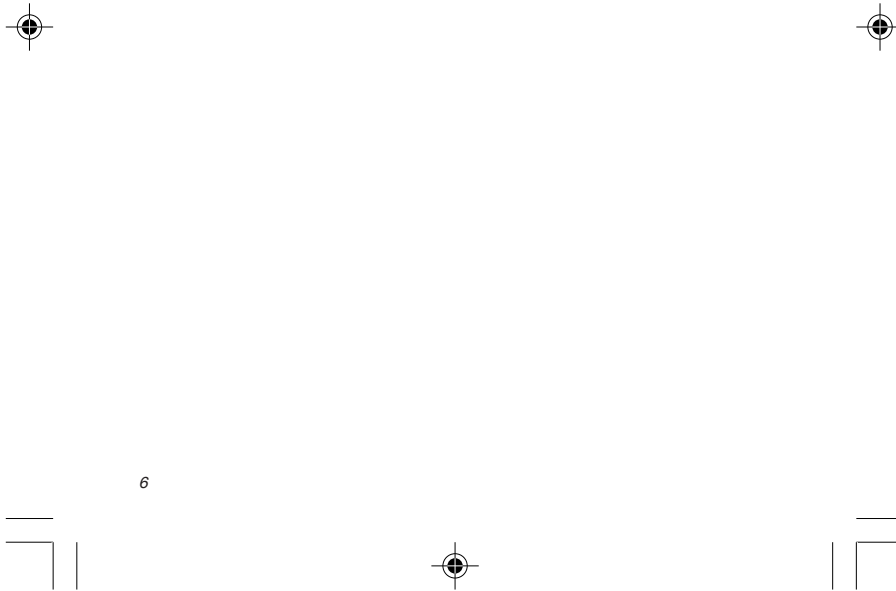



Blank page





gofanco[®]



Thank you for choosing gofanco



www.gofanco.com

